



## Thermobonded pleated filter bag with increased dirt-holding capacity

Eaton's MAX-LOAD extended life thermobonded pleated filter bags offer solutions to a wide range of applications requiring dramatically increased capacity applicable in all industrial processes.

MAX-LOAD pleated filter bags are manufactured from nominal rated extended-life needle felt filter media. The pleated media construction combined with the filter media results in up to 10 times increased dirt-holding capacity compared to similar sized standard needle felt.

### Features and benefits

- Pleated media structure allows for 4 times more surface area compared to a similar size standard filter bags in the same bag housing
- Available in polypropylene with matching end caps and seal rings to cover most processing conditions
- Thermo-bonded end caps provide a strong, bypass-free and seamless construction
- Extended-life needle felt filter media can cover a wide range of filtration needs

- Fits in all Eaton standard size 01 and 02 restrainer baskets
- Produced according to Eaton's silicon-free process<sup>1</sup>
- Patented SENTINEL® seal ring provides 100% bypass-free filtration
- Outer cage structure provides additional support against harsh conditions

### Filter specifications

**Materials**  
Needle felt (POXL):  
Polypropylene

**Seal rings**  
SENTINEL seal ring with end caps in polypropylene and polyester copolymer

**Retention ratings**  
1, 5, 10, 25 and 50 µm nominal

### Dimensions/Parameters

#### Sizes

01: Ø 180 x 345 mm L  
02: Ø 180 x 730 mm L

#### Filter area

01: 0.8 m<sup>2</sup>  
02: 1.6 m<sup>2</sup>

#### Max. operating temperature

Polypropylene: 90 °C

#### Max. differential pressure

2.5 bar

#### Recommended change-out pressure for disposal<sup>2</sup>

0.8 – 1.5 bar

#### Max. flow rates<sup>3</sup>

01: 10 m<sup>3</sup>/h  
02: 20 m<sup>3</sup>/h



Powering Business Worldwide

# MAX-LOAD Pleated Filter Bag Range



**Strong cage supports the filter element during harsh conditions**




**Pleated structure with extended-life media provides vastly increased dirt-holding capacity**



**Bypass-free sealing through SENTINEL seal ring**

## Ordering information

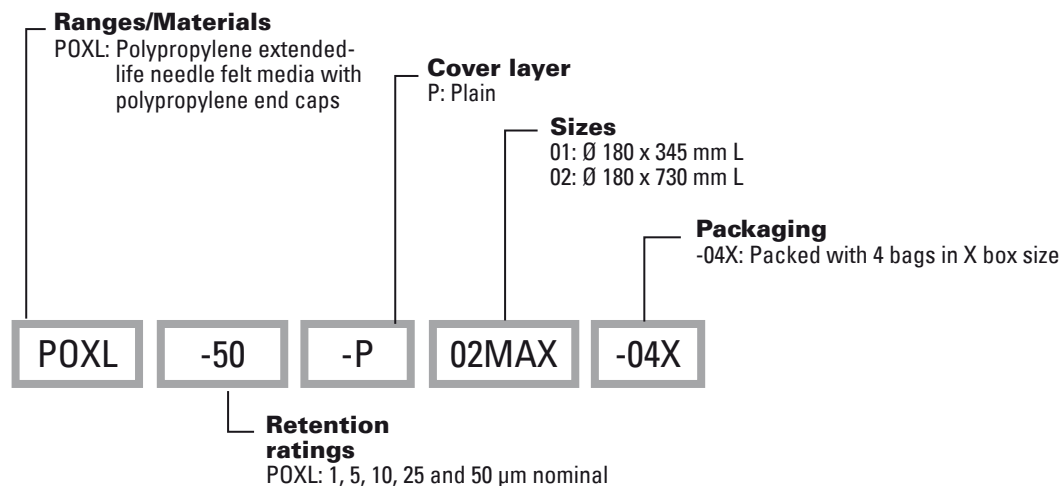

<sup>1</sup> Based on an accepted paint compatibility test (see document QUC-STA-10).

<sup>2</sup> Depending on the respective application requirements.

<sup>3</sup> For liquids with a dynamic viscosity of 1 mPa·s @ 20 °C.

**North America**  
44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

**China**  
No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

**Europe/Africa/Middle East**  
Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

**Singapore**  
100G Pasir Panjang Road #07-08  
Singapore 118523  
Tel: +65 6825-1668

Friedensstraße 41  
68804 Altlußheim, Germany  
Tel: +49 6205 2094-0  
An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

**Brazil**  
Rua Clark, 2061 - Macuco  
13279-400 - Valinhos, Brazil  
Tel: +55 11 3616-8400

**For more information, please email us at [filtration@eaton.com](mailto:filtration@eaton.com) or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)**

© 2019 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

EN  
EF-FTB-22  
01-2019